

I9000S Smart POS Payment Terminal User Guide

1


Appearance and Buttons

Front View




- Touch screen: Displays all information needed to operate.
- LED Indicator: Indicates system status while application generated notifications(programmable).
- Contactless Card Reader: Provides communication with Contactless IC cards.
- IC Card Reader: Read the chip-based bank cards.
- Magnetic Stripe Card Reader: Read the Magnetic stripe cards.
- Key Pad: Fn Button/Cancel button/Back button /Enter button.
- Printer: Thermal paper printing.
- Cold-boot: press "Fn", then click reset button.

Side view

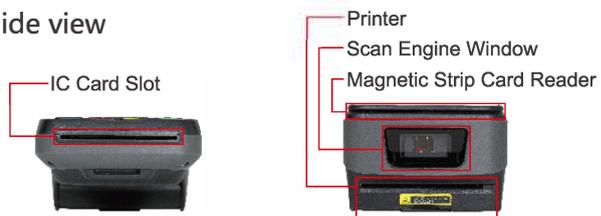

2

Back view

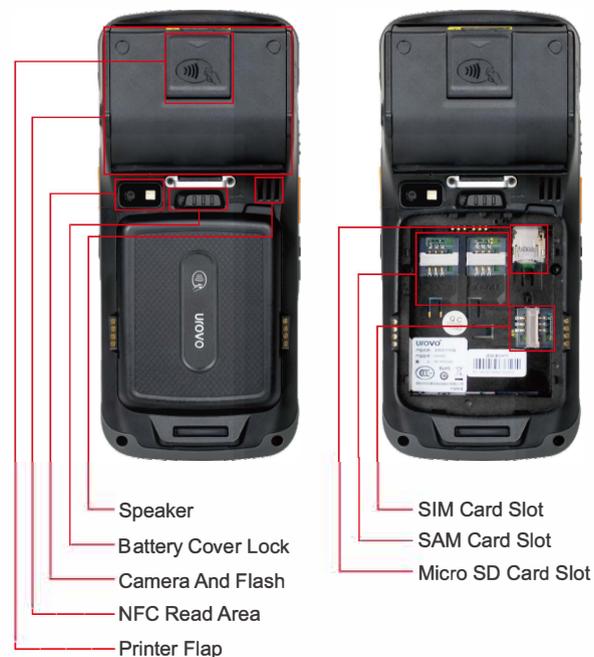

3

Lithium-ion Battery Instructions And Notes

Customer Instruction

1. Set up device (including battery) immediately upon receiving device. Do not allow the battery to be completely drained during storage.
2. Do not charge device at extreme temperature (below 5 Celsius and above 45 degree Celsius).
3. The battery should only be using by the power adaptor or cradle provided with the product.
4. To store the device, remove the battery from the device and store separately. Do not store device with battery installed.
5. Charge and discharge battery every 3 month during storage. Optimal battery charge for storage is 60%-70%.
6. Battery should be stored in a cool, dry and well-ventilated environment, Urovo recommends battery storage at 20 °C ~ 40 °C / 65±20%RH environment.

Transport Precautions

1. Do not transport the battery at ambient temperature higher than 65 °C .
2. Please keep device and battery separately during storage
3. Pack with battery with appropriate packing materials.

Precautions

1. Do not expose battery into a fire or heat source;
2. Do not short the battery
3. Do not intentionally drop or put battery in violent mechanical motion
4. Do not immerse battery in water or store it in humid environment.
5. Do not tampered with charger or use charger that is suspected to be tampered with
6. If battery appears to be discolored, swollen, unusually hot, remove battery from the device immediately and dispose appropriately.
7. Battery is consumable product. Battery capacity will decrease over time. Replace battery between one or two years.
8. When there is any accident and emergency pertaining battery usage, please contact Urovo on time and provide the relevant information such as photographs and operation environment.

Disclaimer

- UROVO is not responsible for users' personal and property safety under the following circumstances
1. Abusive and inappropriate usage.
 2. Using unqualified logistic services to transport the battery.
 3. Battery not purchased from official Urovo sales channel.

4

Battery Installation

Insert the battery into the battery compartment. Battery should sit tightly in the compartment when correctly installed. Do not use excessive force to insert the battery.



Close the cover and fix the battery cover lock.

Battery Operation

Charge the battery only with original power adaptor.
Do not short the battery. Do not store battery in hot, humid, or corrosive environment. Do not subject battery to abusive mechanical impact.



Do not store battery when it is fully charged or completely drained. If device is not used for a long time, remove the battery from the device.

Battery Charging

Charge By DC Power Adaptor

Plug in the power adaptor connector into the DC power port on the terminal device. Red color LED at top left corner indicates at battery is charging. Green LED indicates battery is fully charged.


5

Cradle Specification

6

Front View

Rear View

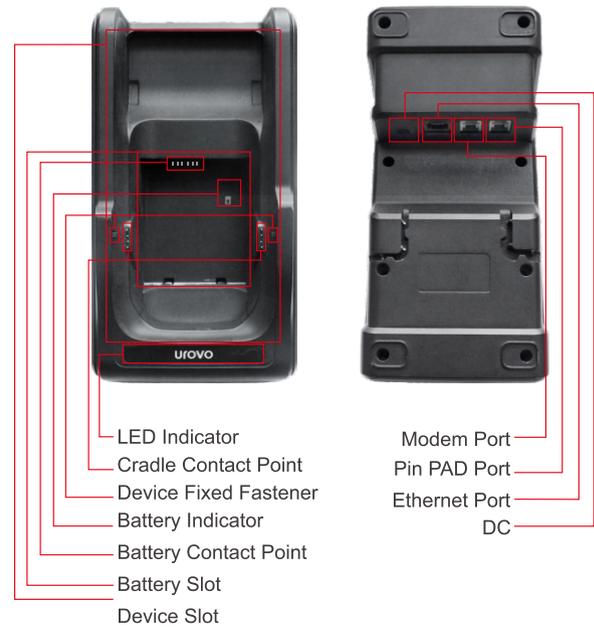

Side View



Cradle Installation

7

1. Connect the DC port of the cradle to the power adaptor, and the LED indicator will turn green to indicate it is operational.
 2. Insert battery into cradle. LED is red when charging, and green when it is fully charged.
 3. Place device into the cradle.
- The LED indicator on the device will turn red when charging.



Installing the SIM/TF Card

8



Insert the SIM/TF Card into their corresponding slots in the battery compartment.
Installing TF Card is similar to SIM Card.

Note

1. Standard SIM Card is required.
2. You should gently push the SIM/TF card to the correct position without using excessive force.
3. To remove the TF card, press the exposed part of the TF Card inward, and the card will be ejected from the slot. Do not use excessive force.

Installing Media Roll

1. Open the Media Cover.
2. Load the Media roll, note direction media pulled off the roll.
3. Pull Media out of the printer
4. Close the Media Cover.



Magnetic Stripe Card Operating Instructions

1. Hold on the device and bank card;
2. Swipe the IC card smoothly with the magnetic strip toward inside;

Contact IC Card Instructions

Insert IC card into the device gently with metal contact upward. Overexertion should be avoid when installing or removing the card.



Contactless IC Card Instructions


To read non-contact card, place card near the NFC antenna, as shown below:




Computer On-line Instructions

When you personal computer installed android system drivers, you can connect device and personal computers through a USB data cable (you can obtain these software from our technical support team).
Once you have installed the required software driver, insert USB cable into the device and the computer's USB port, and you will see the device screen as shown in the figure.

9

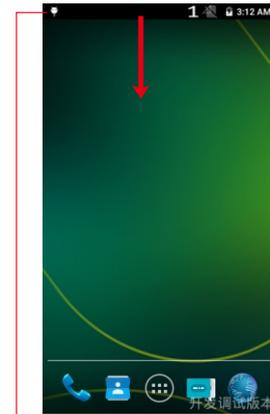


Tap the top of the screen, drag downwards and the USB setting interface will appear.

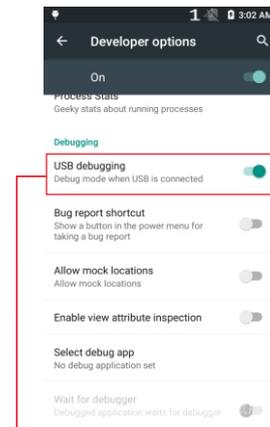


Check the USB debug if you intend to develop software and step through your code with the device.

10

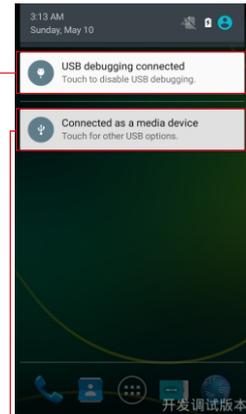

Click on this to go the next left interface

Click on this to go the next left interface

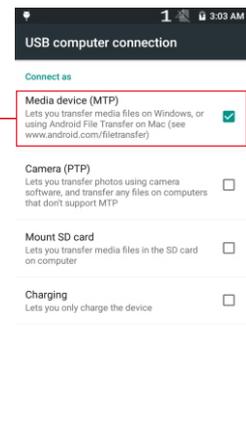

Check the MTP option if you intend to transfer files between your PC and the device.

Note: the contents of this manual are subject to change without prior notice.